


多孔及扁孔型尼龙电缆接头

Multi-hole & Flat-hole Cable Glands

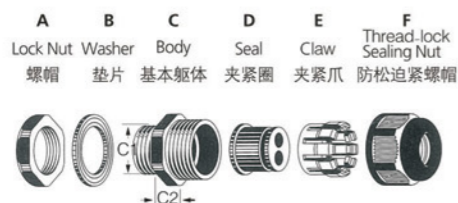


螺牙规格: 公制牙 (Metric), 符合欧盟规范。
 产品材质: A.C.E.F部分采用特殊UL认可之尼龙PA66制成 (防火等级UL94V-2), B及D部分采用标准EPDM户外耐候橡胶。(其他用途橡胶可接受定制)
 保护等级: IP68-10
 工作温度: 静态-40°C至100°C, 或瞬间可耐至120°C; 动态-20°C至80°C, 或瞬间可耐至100°C。
 产品特性: 特殊设计的夹紧圈与夹紧爪, 夹紧电缆范围大, 其电线固拉特强, 气密性完美, 并可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
 颜色种类: 黑色、灰色, 其它颜色可定做。
 多样出孔: 有2-8也电池、电缆专用之出线设计, 是每一个别之电缆得到最佳之防水绝颜效果, 且不至相互纠缠。
 Thread: Metric, EU standard Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A.C.E.F parts; EPDM rubber for B.D parts
 Protection degree: IP68-10 Working temperature: -40°C to 100°C
 Features: The claws and seals of excellent design. Sealing nut have a "click" sound and re-open, can hold cable firmly and have a wider cable range.
 Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.
 Color: Black and gray (Special colors customizable)
 Seals: For cable outlet holes (several holes and flat), all the cables can not easily endangled and waterproof respectively

夹紧圈形状 Seal Holes	螺牙规格 Thread	编号 Cat.No.	适用电缆 Cable Range	螺紋外径 Thread O.D.C1	机板孔径 Panel Mounting Hole	螺紋长度 Thread Length C2	扳手径 Spanner Size A&I	包装 Std.Pkg.pcs
⊙	M12X1.5	MG12A-H2-03	3-1.2	12	12-12.3	9	18/19	50
	M16X1.5	MG16A-H2-04	4-1.6	16	16-16.3	15	22/22	50
	M20X1.5	MG20A-H2-03	3.5-2	20	20-20.3	15	27/27	50
	M20X1.5	MG20A-H2-06	6-2.5	20	20-20.3	15	27/27	50
	M25X1.5	MG25A-H2-05	5-2	25	25-25.4	15	33/33	50
	M25X1.5	MG25A-H2-08	8.7-4.5	25	25-25.4	15	33/33	50
	M32X1.5	MG32A-H2-10	10-5	32	32-32.4	15	41/41	10
	M12X1.5	MG12A-H3-02	2.6-1.2	12	12-12.3	9	18/19	50
	M16X1.5	MG16A-H3-04	4-1.6	16	16-16.3	15	22/22	50
	M20X1.5	MG20A-H3-03	3.5-1.5	20	20-20.3	15	27/27	50
⊕	M20X1.5	MG20A-H3-05	5-2	20	20-20.3	15	27/27	50
	M25X1.5	MG25A-H3-05	5-2	25	25-25.4	15	33/33	50
	M25X1.5	MG25A-H3-08	8-4	25	25-25.4	15	33/33	50
	M32X1.5	MG32A-H3-10	10-5	32	32-32.4	15	41/41	10
	M12X1.5	MG12A-H4-02	2.3-1	12	12-12.3	9	18/19	50
	M16X1.5	MG16A-H4-03	3-1.2	16	16-16.3	15	22/22	50
	M20X1.5	MG20A-H4-03	3.5-1.5	20	20-20.3	15	27/27	50
	M20X1.5	MG20A-H4-04	4.5-2	20	20-20.3	15	27/27	50
	M25X1.5	MG25A-H4-05	5-2	25	25-25.4	15	33/33	50
	M25X1.5	MG25A-H4-07	7-3.5	25	25-25.4	15	33/33	50
⊗	M32X1.5	MG32A-H4-09	9-4.5	32	32-32.4	15	41/41	10
	M16X1.5	MG16A-H5-02	2.5-1	16	16-16.3	15	22/22	50
	M20X1.5	MG20A-H5-03	3-1.2	20	20-20.3	15	27/27	50
	M20X1.5	MG20A-H5-04	4.2-1.7	20	20-20.3	15	27/27	50
	M25X1.5	MG25A-H5-03	3.5-1.5	25	25-25.4	15	33/33	50
	M25X1.5	MG25A-H5-06	6-3	25	25-25.4	15	33/33	50
	M32X1.5	MG32A-H5-08	8-4	32	32-32.4	15	41/41	10
	M16X1.5	MG16A-H6-02	2-1	16	16-16.3	15	22/22	50
	M20X1.5	MG20A-H6-03	3-1.2	20	20-20.3	15	27/27	50
	M25X1.5	MG25A-H6-03	3.5-1.5	25	25-25.4	15	33/33	50
⊘	M25X1.5	MG25A-H6-05	5.3-2.4	25	25-25.4	15	33/33	50
	M32X1.5	MG32A-H6-07	7-3.5	32	32-32.4	15	41/41	10
	M20X1.5	MG20A-H7-03	3-1.2	20	20-20.3	15	27/27	50
	M25X1.5	MG25A-H7-03	3.5-1.5	25	25-25.4	15	33/33	50
	M32X1.5	MG32A-H7-06	6-3	32	32-32.4	15	41/41	10
	M20X1.5	MG20A-H8-02	2.8-1	20	20-20.3	15	27/27	50
	M25X1.5	MG25A-H8-03	3.5-1.5	25	25-25.4	15	33/33	50
	M16X1.5	MG16A-0610	6X10	16	16-16.3	15	22/22	50
	M20X1.5	MG20A-0612	6.5X12	20	20-20.3	15	27/27	50
	M20X1.5	MG20A-0614	6X14	20	20-20.3	15	27/27	50
⊖	M20X1.5	MG20A-0712	7X12	20	20-20.3	15	27/27	50
	M20X1.5	MG20A-0714	7X14	20	20-20.3	15	27/27	50
	M25X1.5	MG25A-0614	6X14	25	25-25.4	15	33/33	50
	M25X1.5	MG25A-0714	7X14	25	25-25.4	15	33/33	50
	M32X1.5	MG32A-0822	8X22	32	32-32.4	15	41/41	10
	M40X1.5	MG40A-1028	10X28.5	40	40-40.3	20	50/50	10
	M40X1.5	MG40A-0529	5.5X29	40	40-40.3	20	50/50	10

快速软管接头

Quick Connector for Flexible Pipes



螺牙规格: 公制牙 (Metric), PG牙及 (PF牙)。
 产品材质: 采用UL认可之尼龙PA66制成 (防火等级UL94V-2), B及D部分采用标准EPDM户外耐候橡胶。(其他用途橡胶可接受定制)
 保护等级: IP68-10
 工作温度: 静态-40°C至100°C, 或瞬间可耐至120°C; 动态-20°C至80°C, 或瞬间可耐至100°C。
 产品特性: 内锁扣和本体特殊设计, 装卸只需拔插无需工具
 颜色种类: 黑色、灰色, 其它颜色可定做。
 Thread: Metric, PG and G(PF) Materials: UL approved Nylon PA66 (Flammability UL 94V-2)
 Protection degree: IP68-10 Working temperature: -40°C to 100°C
 Features: Special design with inner locking buckle making the mounting and dismounting done by simple plugging or pulling, without using tools
 Color: Black and gray (Special colors customizable)

型号 Item No.	软管规格 Specifications for flexible pipe	螺紋尺寸 Dimension of thread	AG外径 (mm) AG outer diameter	AG内径 (mm) AG Inner diameter	GL (mm)	H	包装 Std.Pkg.pcs
PJ-SM-G-M10-10	AD10.0	M10X1.0	10.0	6.5	10.0	23.0	100
PJ-SM-G-M12-10	AD10.0	M12X1.5	12.0	6.5	10.0	25.0	100
PJ-SM-G-M16-10	AD10.0	M16X1.0	16.0	6.5	10.0	25.0	100
PJ-SM-G-M10-11.6	AD11.6	M10X1.5	10.0	8.0	10.0	23.0	100
PJ-SM-G-M12-11.6	AD10.6	M12X1.5	12.0	8.0	10.0	25.0	100
PJ-SM-G-M12-13	AD13.0	M12X1.5	12.0	7.5	11.0	25.0	100
PJ-SM-G-M16-13	AD13.0	M16X1.5	16.0	10.0	10.0	25.0	100
PJ-SM-G-M18-13	AD13.0	M18X1.5	18.0	10.0	10.0	25.0	100
PJ-SM-G-M20-13	AD13.0	M20X1.5	20.0	10.0	10.0	25.0	100
PJ-SM-G-M16-15.8	AD15.8	M16X1.5	16.0	11.5	10.0	27.5	100
PJ-SM-G-M18-15.8	AD15.8	M18X1.5	18.0	12.0	10.0	27.5	100
PJ-SM-G-M20-15.8	AD15.8	M20X1.5	20.0	12.0	10.0	27.5	50
PJ-SM-G-M20-18.5	AD18.5	M20X1.5	20.0	14.3	12.0	28.0	50
PJ-SM-G-M20-21.2	AD21.2	M20X1.5	20.0	15.0	13.0	31.5	50
PJ-SM-G-M24-21.2	AD21.2	M24X1.5	24.0	18.0	13.0	31.5	50
PJ-SM-G-M25-21.2	AD21.2	M25X1.5	25.0	17.0	13.0	27.0	50
PJ-SM-G-M25-25	AD25.0	M25X1.5	25.0	19.5	14.0	29.0	50
PJ-SM-G-M25-28.5	AD28.5	M25X1.5	25.0	20.0	14.0	34.0	50
PJ-SM-G-M27-28.5	AD28.5	M27X2.0	27.0	20.5	14.0	34.0	50
PJ-SM-G-M30-28.5	AD28.5	M30X2.0	30.0	22.0	14.0	34.0	50
PJ-SM-G-M32-28.5	AD28.5	M32X1.5	32.0	22.0	14.0	34.0	50
PJ-SM-G-M32-32	AD32.0	M32X1.5	32.0	22.0	14.0	34.0	20
PJ-SM-G-M32-34.5	AD34.5	M32X1.5	32.0	27.0	14.0	36.0	20
PJ-SM-G-M36-34.5	AD34.5	M36X2.0	36.0	29.0	14.0	36.0	20
PJ-SM-G-M40-34.5	AD34.5	M40X1.5	40.0	29.0	14.0	36.0	20
PJ-SM-G-M40-42.5	AD42.5	M40X1.5	40.0	34.0	14.0	38.0	10
PJ-SM-G-M42-42.5	AD42.5	M42X1.5	42.0	36.0	14.0	38.0	10
PJ-SM-G-M48-42.5	AD42.5	M48X2.0	48.0	36.0	14.0	38.0	10
PJ-SM-G-M50-54.5	AD54.5	M50X1.5	50.0	44.0	15.5	39.0	10
PJ-SM-G-M60-54.5	AD54.5	M60X2.0	60.0	48.0	15.5	39.0	5
PJ-SM-G-M63-54.5	AD54.5	M63X1.5	63.0	48.0	15.5	39.0	5
PJ-SM-G-PG7-10	AD10.0	PG7	12.3	6.5	10.0	23.0	100
PJ-SM-G-PG7-11.6	AD11.6	PG7	12.3	8.0	10.0	23.0	100
PJ-SM-G-PG9-13	AD13.0	PG9	15.0	10.0	10.0	25.0	100
PJ-SM-G-PG11-15.8	AD15.8	PG11	18.4	12.0	10.0	27.5	100
PJ-SM-G-PG13.5-15.8	AD15.8	PG13.5	20.2	12.5	10.0	28.0	100
PJ-SM-G-PG13.5-18.5	AD18.5	PG13.5	20.2	14.3	12.0	28.0	100
PJ-SM-G-PG16-21.2	AD21.2	PG16	22.3	17.0	13.0	32.0	50
PJ-SM-G-PG21-28.5	AD28.5	PG21	28.0	23.0	14.0	34.0	50
PJ-SM-G-PG29-32	AD32.0	PG29	36.7	26.0	14.0	36.0	20
PJ-SM-G-PG29-34.5	AD34.5	PG29	36.7	29.0	14.0	36.0	20
PJ-SM-G-PG36-42.5	AD42.5	PG36	46.7	36.0	14.0	38.5	20
PJ-SM-G-PG48-54.5	AD54.5	PG48	59.0	48.0	15.0	40.0	10
PJ-SM-G3/8-15.8	AD15.8	G3/8"	16.6	12.0	10.0	28.0	100
PJ-SM-G1/2-21.2	AD21.2	G1/2"	20.9	15.0	13.0	31.0	50
PJ-SM-G1/2-25	AD25.0	G1/2"	20.9	16.0	13.0	35.0	50
PJ-SM-G3/4-28.5	AD28.5	G3/4"	26.0	20.0	14.0	35.0	50
PJ-SM-G1-34.5	AD34.5	G1"	33.0	27.0	14.0	36.0	20
PJ-SM-G2-54.5	AD54.5	G2"	29.6	48.0	15.5	39.0	5