

BJ-NPT外螺纹大/内螺纹小


BJ-公制外螺纹小/内螺纹大

变径接头

reducer union

变径接头

reducer union

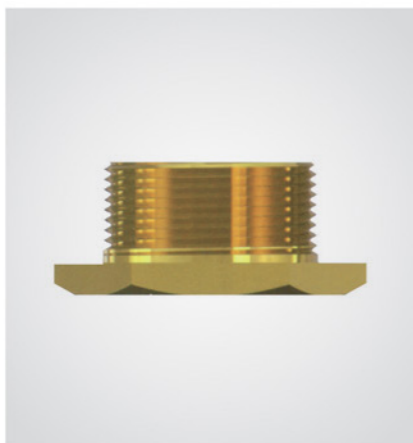

材质 Material	黄铜、黄铜镀镍或不锈钢 (订货时请指明) Brass, brass nickel plated or stainless steel (When ordering, please specify)
特点 Features	适用于螺纹转换或需变径的场所 Suitable for thread conversion or reducing place
工作温度 COT	-60°C ~100°C



材质 Material	黄铜、黄铜镀镍或不锈钢 (订货时请指明) Brass, brass nickel plated or stainless steel (When ordering, please specify)
特点 Features	适用于螺纹转换或需变径的场所 Suitable for thread conversion or reducing place
工作温度 COT	-60°C ~100°C





1、可选附件：锁紧螺母、O型圈、平垫圈、锯齿垫圈、接地片

1、Optional accessories: reducer union ;lock nut,O Ring,flat washer,serrated washers,sheath,grounding

1、可选附件：锁紧螺母、O型圈、平垫圈、锯齿垫圈、接地片

1、Optional accessories: reducer union ;lock nut,O Ring,flat washer,serrated washers,sheath,grounding

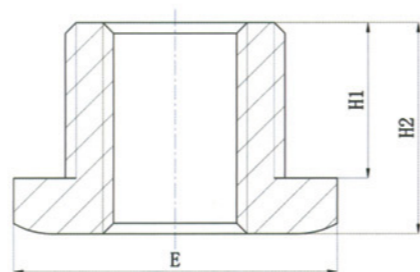

订购示例 (eg) : BJ-NPT1/NPT3/4

单位:mm

规格型号 Gland size	外螺纹 external thread	内螺纹 internal thread	H1	H2	E
BJ-NPT3/8/NPT1/4	NPT3/8	NPT1/4	15.3	19	26
BJ-NPT1/2/NPT3/8	NPT1/2	NPT3/8	20	24	32
BJ-NPT3/4/NPT1/2	NPT3/4	NPT1/2	20.2	24	34
BJ-NPT1/NPT1/2	NPT1	NPT1/2	25.1	30	43
BJ-NPT1/NPT3/4	NPT1	NPT3/4	25.1	30	43
BJ-NPT1-1/NPT3/4	NPT1-1/4	NPT3/4	25.7	30	57
BJ-NPT1-1/4/NPT1	NPT1-1/4	NPT1	25.7	30	57
BJ-NPT1-1/2/NPT1	NPT1-1/2	NPT1	26.1	32	69
BJ-NPT1-1/2/NPT1-1/4	NPT1-1/2	NPT1/4	26.1	32	69
BJ-NPT2/NPT1-1/4	NPT2	NPT1/4	26.9	32	80
BJ-NPT2/NPT1-1/2	NPT2	NPT1/2	26.9	32	80
BJ-NPT2-1/2/NPT1-1/2	NPT2-1/2	NPT1/2	40.1	46	98

订购示例 (eg) : BJ-M32×1.5/M40×1.5

单位:mm

规格型号 Gland size	外螺纹 external thread	内螺纹 internal thread	H1	H2	E
BJ-M12×1.5/M16×1.5	M12×1.5	M16×1.5	15	12	26
BJ-M16×1.5/M20×1.5	M16×1.5	M20×1.5	15	12	32
BJ-M20×1.5/M25×1.5	M20×1.5	M25×1.5	15	12	35
BJ-M20×1.5/M32×1.5	M20×1.5	M32×1.5	15	12	44
BJ-M25×1.5/M32×1.5	M25×1.5	M32×1.5	15	12	44
BJ-M25×1.5/M40×1.5	M25×1.5	M40×1.5	15	12	58
BJ-M32×1.5/M40×1.5	M32×1.5	M40×1.5	15	12	58
BJ-M32×1.5/M50×1.5	M32×1.5	M50×1.5	15	12	69
BJ-M40×1.5/M50×1.5	M40×1.5	M50×1.5	15	12	69
BJ-M40×1.5/M63×1.5	M40×1.5	M63×1.5	15	12	81
BJ-M50×1.5/M63×1.5	M50×1.5	M63×1.5	15	12	81
BJ-M50×1.5/M75×1.5	M50×1.5	M75×1.5	15	12	98